




装配例

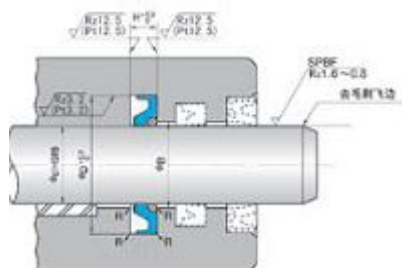

型式例

| 截面图 | 材料 | 温度范围 | 压力 | 速度 | 特点 | 代号 |
|-----|---------------|---------|-----|------|------------------------|----|
| | PU + PA | -40至100 | ≤50 | ≤0.5 | 封隔高温介质，吸收高负荷冲击压力，保护主密封 | H1 |

| d1 | D1 | L1 | d1 | D1 | L1 | d1 | D1 | L1 | d1 | D1 | L1 |
|-------|-----------------|-----------------|----|----|----|----|----|----|----|----|----|
| 1-1/4 | 1.819 ±0.004 | 0.140 ±0.005 | | | | | | | | | |
| 1-1/2 | 2.067 ±0.004 | 0.140 ±0.005 | | | | | | | | | |
| 1-3/4 | 2.319 ±0.004 | 0.140 ±0.005 | | | | | | | | | |
| 2 | 2.567 ±0.004 | 0.140 ±0.005 | | | | | | | | | |
| 2-3/4 | 3.402 ±0.004 | 0.234 ±0.005 | | | | | | | | | |
| 3 | 3.649 ±0.004 | 0.234 ±0.005 | | | | | | | | | |
| 4 | 4.669 ±0.004 | 0.234 ±0.005 | | | | | | | | | |
| 1-3/4 | 2.395 ±0.005 | 0.220 ±0.005 | | | | | | | | | |
| 2-1/4 | 2.929 ±0.004 | 0.234 ±0.005 | | | | | | | | | |
| 2-1/2 | 3.177 ±0.004 | 0.234 ±0.005 | | | | | | | | | |
| 3-1/2 | 4.169 ±0.004 | 0.234 ±0.005 | | | | | | | | | |
| 2-1/2 | 3.116 +0.005/-0 | 0.247 +0.010/-0 | | | | | | | | | |
| 2-3/4 | 3.366 +0.005/-0 | 0.247 +0.010/-0 | | | | | | | | | |
| 3 | 3.616 +0.005/-0 | 0.247 +0.010/-0 | | | | | | | | | |
| 3-1/2 | 4.116 +0.005/-0 | 0.247 +0.010/-0 | | | | | | | | | |
| 4 | 4.616 +0.005/-0 | 0.247 +0.010/-0 | | | | | | | | | |
| 4-1/2 | 5.116 +0.005/-0 | 0.247 +0.010/-0 | | | | | | | | | |
| 4-3/4 | 5.366 +0.005/-0 | 0.247 +0.010/-0 | | | | | | | | | |
| 5 | 5.616 +0.005/-0 | 0.247 +0.010/-0 | | | | | | | | | |
| 5-1/2 | 6.116 +0.005/-0 | 0.247 +0.010/-0 | | | | | | | | | |
| 6 | 6.616 +0.005/-0 | 0.247 +0.010/-0 | | | | | | | | | |
| 6-1/2 | 7.116 +0.005/-0 | 0.247 +0.010/-0 | | | | | | | | | |
| 7 | 7.616 +0.005/-0 | 0.247 +0.010/-0 | | | | | | | | | |
| 7-1/2 | 8.116 +0.005/-0 | 0.247 +0.010/-0 | | | | | | | | | |
| 8 | 8.616 +0.005/-0 | 0.247 +0.010/-0 | | | | | | | | | |